




AER Series Router

AER 3100 / AER 3150

Spec Sheet

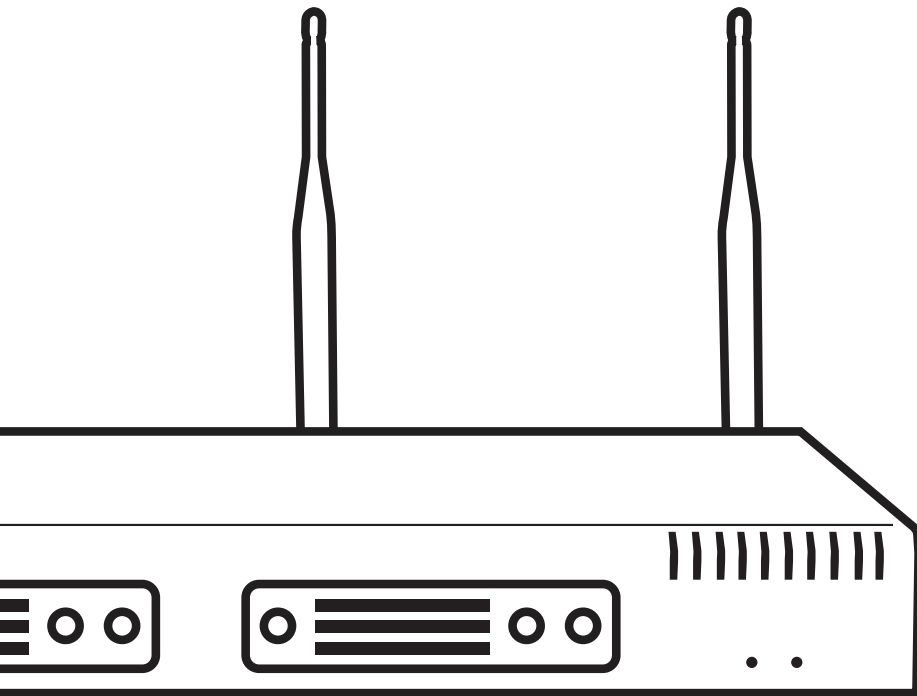

cradlepoint.com

INTRODUCTION

WHAT'S IN THE BOX

- AER3100 or AER3150
- MC400 4G LTE or LTE Advanced modem with security screws (2)
- External 3G/4G mobile broadband modem antennas (2) (SMA); finger tighten only
- External dual-band high-gain WiFi antennas (3) reverse SMA (5 dBi, 2.4 GHz, 5 dBi 5 GHz, VSWR ≤ 2); finger tighten only
- 54V 2.25A AC/DC power adapter
- Ethernet cable
- Quick Start Guide
- Warranty information
- Brackets (2) for rack mounting with screws (8 + 4)
- Rubber feet (4) for desk mounting
- Field-replaceable battery for real-time clock, with pull tab

KEY FEATURES

WAN

- LP6: LTE Advanced LTE/HSPA+ (SIM-based Auto-Carrier Selection for all North American carriers and European operators)
- LPE: 4G LTE/HSPA+/EVDO (multi-carrier, North America)
- LP3: 4G LTE/HSPA+ (Europe, EMEA, and Australia/New Zealand)
- Dual integrated modem option
- Dual SIM slot in each modem
- Most models include support for active GPS
- 13 10/100/1000 Ethernet ports (WAN/LAN switchable)
- WiFi as WAN (only on AER3100)
- Failover/Failback
- Load Balancing
- Advance Modem Failure Check
- WAN Port Speed Control
- WAN/LAN Affinity
- IP Passthrough
- Standby

LAN

- 13 10/100/1000 Ethernet ports (WAN/LAN switchable); Supports four ports of PoE (9-12) for class I, II, or III devices (up to 15W) or two ports high power PoE for class IV devices (up to 30W)
- LLDP support
- VLAN 802.1Q
- DHCP Server, Client, Relay
- DNS and DNS Proxy
- DynDNS
- Split DNS
- UPnP
- DMZ

- Multicast/Multicast Proxy
- QoS (DSCP and Priority Queuing)
- MAC Address Filtering

WIFI (ONLY ON AER3100)

- Dual-Band Dual-Concurrent (3x3 MIMO)
- 802.11 (a/b/g/n/ac)
- Up to 256 connected devices (128 per channel – 2.4 GHz and 5 GHz)
- WEP Auto, WPA/WPA2 Personal, WPA2 Enterprise (WiFi)
- Hotspot/Captive Portal
- SSID-based Priority

MANAGEMENT

- Cradlepoint Enterprise Cloud Manager (ECM) ²
- Web UI, API, CLI
- GPS Location
- Data Usage Alerts (router and per client)
- Advanced Troubleshooting (support) ⁵
- Device Alerts
- SNMP
- SMS control
- Console Port for OOBM Management

VPN AND ROUTING

- IPsec Tunnel – up to 40 concurrent sessions
- OpenVPN (SSL VPN) ¹
- L2TP ¹
- GRE Tunnel
- OSPF/BGP/RIP ¹
- Route Filters (Access Control Lists, Prefix Filters, Route Maps, Communities for BGP)
- Policy-based Routing
- Per-Interface Routing
- Static Routing
- NAT-less Routing
- Virtual Server/Port Forwarding
- VTI Tunnel Support
- NEMO/DMNR ¹
- IPv6
- VRRP ¹
- STP ¹
- NHRP ¹

SECURITY

- RADIUS and TACACS+ support*
- 802.1x authentication for Wireless and Wired Networks
- Zscaler Internet Security ⁴
- Certificate support
- ALGs
- MAC Address Filtering
- CP Secure Threat Management ³

- Advanced Security Mode (local user management only)
- Per-Client Web Filtering
- IP Filtering
- Content Filtering (basic)
- Website Filtering
- Real-time clock with battery backup for CA certificate validation

* - Native support for authentication. Authorization and accounting support through hotspot/captive portal services

CLOUD OPTIMIZED IP COMMUNICATIONS

- Automated WAN Failover/Failback support
- WAN Affinity and QoS allow prioritization of VoIP services
- Advanced VPN connectivity options to HQ
- SIP ALG and NAT to allow VoIP and UC communications to traverse firewall
- MAC Address Filtering
- 802.1p/q for LAN QoS segmentation and treatment of VoIP on LAN
- Private Network support (wired and 4G WAN)
- Cloud-based management ²

1 – Requires an [ECM PRIME](#) subscription or an [Extended Enterprise License](#)

2 – [Enterprise Cloud Manager](#) requires a subscription

3 – Requires a [CP Secure Threat Management](#) license

4 – Requires [Zscaler](#) Internet Security License

5 - Requires [CradleCare](#) Support

SPECIFICATIONS

WAN:

- Integrated LP6 Category 6 LTE Advanced LTE modem (with DC-HSPA+ failover) or LPE 4G LTE modem (with HSPA+/EVDO/3G and 2G failover) or LP3 4G LTE modem (with HSPA+ and 2G failover)
- One modem included, dual-modem option
- 13 10/100/1000 Ethernet ports (cable/DSL/T1/satellite/Metro Ethernet; WAN/LAN switchable)
- WiFi* (as WAN; Metro WiFi) 3x3 MIMO 2.4 GHz or 5 GHz (802.11 a/b/g/n/ac)

LAN:

- Dual-band dual-concurrent WiFi* (802.11 a/b/g/n/ac)
- 13 10/100/1000 Ethernet ports (WAN/LAN switchable)
- Serial console

TEMPERATURE:

- 0°C to 50°C (32°F to 122°F) operating
- -20°C to 70°C (-4°F to 158°F) storage
- Redundant internal fans for reliable cooling

HUMIDITY (non-condensing):

- 10% to 85% operating
- 5% to 90% storage

MEMORY: 1 GB DRAM; 16MB SPI Flash; 1 GB NAND Flash

SIZE:

- 12.2 x 10.6 x 1.75 in (310 x 270 x 45 mm)
- 1U height for rack mount

WEIGHT: 6 lb

CERTIFICATIONS: FCC, WiFi Alliance, CE, IC, carrier certifications



LAN TO WAN: 950 Mbps

WAN TO LAN: 950 Mbps

STATEFUL THROUGHPUT: 950 Mbps

WIFI POWER (FCC):

- 2402-2483.5 MHz (2.4 GHz band): 29.8 dBm conducted
- 5150-5250 MHz (5 GHz band 1): 28.5 dBm conducted
- 5725-5850 MHz (5 GHz band 3): 24.4 dBm conducted

WIFI POWER (Europe/Rest of World):

- 2.4 GHz band: 19.96 dBm EIRP
- 5150-5250 MHz: 22.98 dBm EIRP

*-only on AER3100

ACCESSORIES

- Second integrated 4G LTE modem
 - MC400LP6 (North America or EU)
 - MC400LPE-VZ (Verizon)
 - MC400LPE-AT (AT&T)
 - MC400LPE-SP (Sprint)
 - MC400LPE-GN (generic – for use on T-Mobile in the U.S. and Rogers, Bell, & TELUS in Canada)
 - MC400LP3-EU (Europe)
- 700 MHz – 2700 MHz Wide Band Directional Antenna (Yagi/Log- Periodic) Part #: 170588-000
- 12" Mag-Mount Antenna with SMA Male Connector Part #: 170605-000
- 4" Mini Mag-Mount Antenna with SMA Male Connector Part #: 170606-000
- 2.4/5 GHz Dual-band Dual-concurrent WiFi Antenna Part #: 170628-000 (WiFi models only)
- Universal 3G/4G/LTE Modem Antenna Part #: 170649-000
- GPS Screw-Mount Antenna Part #: 170651-000
- GPS Mag-Mount Antenna Part #: 170652-000
- Multi-Band Omni-Directional Antenna Part #: 170668-000
- Indoor/Outdoor Panel Patch Part #: 170669-000

BUSINESS-GRADE MODEM SPECIFICATIONS

AER3100/AER3150 LP6 models include an integrated LTE Advanced Category 6 4G LTE modem. The LP6 modems support SIM-Based Auto-Carrier selection so there is only one model for all of North America. Simply insert the SIM and wait for the router to automatically detect the SIM and establish a connection.

The LTE bands certified for each carrier are listed below.

AER3100LP6-NA, AER3150LP6-NA, AER3100LP6-EU, AER3150LP6-EU, AER3100LP6-UK, AER3150LP6-UK

- Technology: LTE Advanced, HSPA+
- Downlink Rates: LTE 300 Mbps, HSPA+ 42.2 Mbps
- Uplink Rates: LTE 50 Mbps, HSPA+ 5.76 Mbps
- Frequency Bands:
 - LTE Bands 1-5, 7, 8, 12, 13, 17, 20, 25, 26, 29, 30, 41
 - Verizon: 2, 4, 5, 13 (XLTE support w/carrier aggregation)
 - AT&T: 2, 4, 5, 12/17, 29, 30
 - Sprint: 25, 26, 41 (LTE Plus Support)
 - T-Mobile: 2, 4, 12 (T-Mobile Wideband LTE Support)
 - Generic: all

- Carrier Aggregation:
 - 1+ 8
 - 2+ 2/5/12 (17 w/MFBI)/13/29
 - 3+ 7/20
 - 4+ 4/5/12 (17 w/MFBI)/13/29
 - 5+ 2/4/30
 - 7+ 3/7/20
 - 8+ 1
 - 12 (17 w/MFBI) + 2/4/30
 - 13+ 2/4
 - 20+ 3/7
 - 30+ 5/12 (17 w/MFBI)
 - 41+ 41
- Fallback: WCDMA/DC-HSPA+ (42/5.76 Mbps): Bands 1, 2, 3, 4, 5, 8
- Power: LTE 23 dBm +/- 1, HSPA+ 23 dBm +/- 1
- Antennas: two SMA male (plug), finger tighten only (maximum torque spec is 7 kgfcm)
- GPS: active GPS support
- SMS: SMS support
- Industry Standards & Certs: CE, FCC, GCF-CC, IC, PTCRB, AT&T, Sprint (pending certification), Verizon

AER3100/AER3150LPE models include an internal 4G LTE modem (MC400); specific model names include a specific modem (e.g., the AER3100LPE-VZ includes an MC400LPE-VZ modem for Verizon).

Please note that LPE models are flexible and support bands for multiple cellular providers; however, only the frequency bands in bold below are supported by the listed provider.

AER3100LPE-VZ – 4G LTE/HSPA+/EVDO for Verizon

- Technology : LTE, HSPA+, EVDO Rev A
- Downlink Rates : LTE 100 Mbps, HSPA+ 21.1 Mbps, EVDO 3.1 Mbps (theoretical)
- Uplink Rates : LTE 50 Mbps, HSPA+ 5.76 Mbps, EVDO 1.8 Mbps (theoretical)
- Frequency Bands :
 - LTE Band 2 (1900 MHz), **Band 4 – AWS (1700/2100 MHz)** , Band 5 (850 MHz), **Band 13 (700 MHz)** , Band 17 (700 MHz), Band 25 (1900 MHz)
 - HSPA+/UMTS (850/900/1900/2100 MHz, AWS)
 - GSM/GPRS/EDGE (850/900/1800/1900 MHz)
 - CDMA EVDO Rev A/1xRTT (800/1900 MHz)
- Power : LTE 23 dBm +/- 1, HSPA+ 23 dBm +/- 1, EVDO 24 dBm +0.5/-1 (typical conducted)
- Antennas : two SMA male (plug), 1 dBi (LTE), 2 dBi (Cellular/PCS) gain; finger tighten only (maximum torque spec is 7 kgf-cm)
- GPS: active GPS support
- Industry Standards & Certs : FCC, Verizon
- Modem Part Number : MC400LPE

AER3150LPE-VZ – 4G LTE/HSPA+/EVDO for Verizon

- Technology : LTE, HSPA+, EVDO Rev A
- Downlink Rates : LTE 100 Mbps, HSPA+ 21.1 Mbps, EVDO 3.1 Mbps (theoretical)
- Uplink Rates : LTE 50 Mbps, HSPA+ 5.76 Mbps, EVDO 1.8 Mbps (theoretical)
- Frequency Bands :
 - LTE Band 2 (1900 MHz), **Band 4 – AWS (1700/2100 MHz)** , Band 5 (850 MHz), **Band 13 (700 MHz)** , Band 17 (700 MHz), Band 25 (1900 MHz)
 - HSPA+/UMTS (850/900/1900/2100 MHz, AWS)

- GSM/GPRS/EDGE (850/900/1800/1900 MHz)
- CDMA EVDO Rev A/1xRTT (800/1900 MHz)
- Power : LTE 23 dBm +/- 1, HSPA+ 23 dBm +/- 1, EVDO 24 dBm +0.5/-1 (typical conducted)
- Antennas : two SMA male (plug), 1 dBi (LTE), 2 dBi (Cellular/PCS) gain; finger tighten only (maximum torque spec is 7 kgf-cm)
- GPS: active GPS support
- Industry Standards & Certs : FCC, Verizon
- Modem Part Number : MC400LPE

AER3100LPE-AT – 4G LTE/HSPA+/EVDO for AT&T

- Technology : LTE, HSPA+, EVDO Rev A
- Downlink Rates : LTE 100 Mbps, HSPA+ 21.1 Mbps, EVDO 3.1 Mbps (theoretical)
- Uplink Rates : LTE 50 Mbps, HSPA+ 5.76 Mbps, EVDO 1.8 Mbps (theoretical)
- Frequency Bands :
 - LTE Band 2 (1900 MHz) , Band 4 – AWS (1700/2100 MHz) , Band 5 (850 MHz) , Band 13 (700 MHz), Band 17 (700 MHz), Band 25 (1900 MHz)
 - HSPA+/UMTS (850/900/1900/2100 MHz, AWS)
 - GSM/GPRS/EDGE (850/900/1800/1900 MHz)
 - CDMA EVDO Rev A/1xRTT (800/1900 MHz)
- Power : LTE 23 dBm +/- 1, HSPA+ 23 dBm +/- 1, EVDO 24 dBm +0.5/-1 (typical conducted)
- Antennas : two SMA male (plug), 1 dBi (LTE), 2 dBi (Cellular/PCS) gain; finger tighten only (maximum torque spec is 7 kgf-cm)
- GPS: active GPS support
- Industry Standards & Certs : PTCRB, FCC, IC, AT&T
- Modem Part Number : MC400LPE

AER3150LPE-AT – 4G LTE/HSPA+/EVDO for AT&T

- Technology : LTE, HSPA+, EVDO Rev A
- Downlink Rates : LTE 100 Mbps, HSPA+ 21.1 Mbps, EVDO 3.1 Mbps (theoretical)
- Uplink Rates : LTE 50 Mbps, HSPA+ 5.76 Mbps, EVDO 1.8 Mbps (theoretical)
- Frequency Bands :
 - LTE Band 2 (1900 MHz) , Band 4 – AWS (1700/2100 MHz) , Band 5 (850 MHz) , Band 13 (700 MHz), Band 17 (700 MHz), Band 25 (1900 MHz)
 - HSPA+/UMTS (850/900/1900/2100 MHz, AWS)
 - GSM/GPRS/EDGE (850/900/1800/1900 MHz)
 - CDMA EVDO Rev A/1xRTT (800/1900 MHz)
- Power : LTE 23 dBm +/- 1, HSPA+ 23 dBm +/- 1, EVDO 24 dBm +0.5/-1 (typical conducted)
- Antennas : two SMA male (plug), 1 dBi (LTE), 2 dBi (Cellular/PCS) gain; finger tighten only (maximum torque spec is 7 kgf-cm)
- GPS: active GPS support
- Industry Standards & Certs : PTCRB, FCC, IC, AT&T
- Modem Part Number : MC400LPE

AER3100LPE-SP – 4G LTE/HSPA+/EVDO for Sprint

- Technology : LTE, HSPA+, EVDO Rev A
- Downlink Rates : LTE 100 Mbps, HSPA+ 21.1 Mbps, EVDO 3.1 Mbps (theoretical)
- Uplink Rates : LTE 50 Mbps, HSPA+ 5.76 Mbps, EVDO 1.8 Mbps (theoretical)

- Frequency Bands :
 - LTE Band 2 (1900 MHz), Band 4 – AWS (1700/2100 MHz), Band 5 (850 MHz), Band 13 (700 MHz), Band 17 (700 MHz), Band 25 (1900 MHz)
 - HSPA+/UMTS (850/900/1900/2100 MHz, AWS)
 - GSM/GPRS/EDGE (850/900/1800/1900 MHz)
 - CDMA EVDO Rev A/1xRTT (800/1900 MHz)
- Power : LTE 23 dBm +/- 1, HSPA+ 23 dBm +/- 1, EVDO 24 dBm +0.5/-1 (typical conducted)
- Antennas : two SMA male (plug), 1 dBi (LTE), 2 dBi (Cellular/PCS) gain; finger tighten only (maximum torque spec is 7 kgf-cm)
- GPS: active GPS support
- Industry Standards & Certs : FCC, Sprint
- Modem Part Number : MC400LPE

AER3150LPE-SP – 4G LTE/HSPA+/EVDO for Sprint

- Technology: LTE, HSPA+, EVDO Rev A
- Downlink Rates : LTE 100 Mbps, HSPA+ 21.1 Mbps, EVDO 3.1 Mbps (theoretical)
- Uplink Rates : LTE 50 Mbps, HSPA+ 5.76 Mbps, EVDO 1.8 Mbps (theoretical)
- Frequency Bands :
 - LTE Band 2 (1900 MHz), Band 4 – AWS (1700/2100 MHz), Band 5 (850 MHz), Band 13 (700 MHz), Band 17 (700 MHz), Band 25 (1900 MHz)
 - HSPA+/UMTS (850/900/1900/2100 MHz, AWS)
 - GSM/GPRS/EDGE (850/900/1800/1900 MHz)
 - CDMA EVDO Rev A/1xRTT (800/1900 MHz)
- Power : LTE 23 dBm +/- 1, HSPA+ 23 dBm +/- 1, EVDO 24 dBm +0.5/-1 (typical conducted)
- Antennas : two SMA male (plug), 1 dBi (LTE), 2 dBi (Cellular/PCS) gain; finger tighten only (maximum torque spec is 7 kgf-cm)
- GPS: active GPS support
- Industry Standards & Certs : FCC, Sprint
- Modem Part Number : MC400LPE

AER3100LP3-EU (3100LP3-UK*) – 4G LTE/HSPA+ for Europe (United Kingdom)

- Technology: LTE, HSPA+
- Downlink Rates : LTE 100 Mbps, HSPA+ 21.1 Mbps (theoretical)
- Uplink Rates : LTE 50 Mbps, HSPA+ 5.76 Mbps (theoretical)
- Frequency Bands :
 - LTE Band 1 (2100 MHz), Band 3 (1800 MHz), Band 7 (2600 MHz), Band 8 (900 MHz), Band 20 (800 MHz)
 - HSPA+/UMTS (800/850/900/1900/2100 MHz)
 - GSM/GPRS/EDGE Quad-Band (850/900/1800/1900 MHz)
- Power : LTE Band 1/3/8/20 – 23 dBm +/- 1; LTE Band 7 – 22 dBm +/- 1, HSPA+ 23 dBm +/- 1 (typical conducted)
- Antennas : two SMA male (plug), 1 dBi (LTE), 2 dBi (Cellular/PCS) gain; finger tighten only
- GPS: active GPS support
- Industry Standards & Certs : CE, GCF-CC
- Modem Part Number : MC400LP3

*The 3100LP3-EU and 3100LP3-UK models are equivalent except for the line cord.

AER3150LP3-EU (3150LP3-UK*) – 4G LTE/HSPA+ for Europe (United Kingdom)

- Technology: LTE, HSPA+

- Downlink Rates : LTE 100 Mbps, HSPA+ 21.1 Mbps (theoretical)
- Uplink Rates : LTE 50 Mbps, HSPA+ 5.76 Mbps (theoretical)
- Frequency Bands :
 - LTE Band 1 (2100 MHz), Band 3 (1800 MHz), Band 7 (2600 MHz), Band 8 (900 MHz), Band 20 (800 MHz)
 - HSPA+/UMTS (800/850/900/1900/2100 MHz)
 - GSM/GPRS/EDGE Quad-Band (850/900/1800/1900 MHz)
- Power : LTE Band 1/3/8/20 – 23 dBm +/- 1; LTE Band 7 – 22 dBm +/- 1, HSPA+ 23 dBm +/- 1 (typical conducted)
- Antennas : two SMA male (plug), 1 dBi (LTE), 2 dBi (Cellular/PCS) gain; finger tighten only
- GPS: active GPS support
- Industry Standards & Certs : CE, GCF-CC
- Modem Part Number : MC400LP3

*The 3150LP3-EU and 3150LP3-UK models are equivalent except for the line cord.


AER3100LPE-GN – 4G LTE/HSPA+/EVDO (generic – for use on T-Mobile and US Cellular in the U.S. and Rogers, Bell, & TELUS in Canada)

- Technology **: LTE, HSPA+, EVDO Rev A
- Downlink Rates **: LTE 100 Mbps, HSPA+ 21.1 Mbps, EVDO 3.1 Mbps (theoretical)
- Uplink Rates **: LTE 50 Mbps, HSPA+ 5.76 Mbps, EVDO 1.8 Mbps (theoretical)
- Frequency Bands **:
 - LTE Band 2 (1900 MHz), Band 4 (AWS), Band 5 (850 MHz), Band 13 (700 MHz), Band 17 (700 MHz), Band 25 (1900 MHz)
 - HSPA+/UMTS (850/900/1900/2100 MHz, AWS)
 - GSM/GPRS/EDGE (850/900/1800/1900 MHz)
 - CDMA EVDO Rev A/1xRTT (800/1900 MHz)
- Power : LTE 23 dBm +/- 1, HSPA+ 23 dBm +/- 1, EVDO 24 dBm +0.5/-1 (typical conducted)
- Antennas : two SMA male (plug), 1 dBi (LTE), 2 dBi (Cellular/PCS) gain; finger tighten only (maximum torque spec is 7 kgf-cm)
- GPS: active GPS support
- Industry Standards & Certs : PTCRB, FCC, IC
- Modem Part Number : MC400LPE

AER3150LPE-GN – 4G LTE/HSPA+/EVDO (generic – for use on T-Mobile and US Cellular in the U.S. and Rogers, Bell, & TELUS in Canada)

- Technology : LTE, HSPA+, EVDO Rev A
- Downlink Rates : LTE 100 Mbps, HSPA+ 21.1 Mbps, EVDO 3.1 Mbps (theoretical)
- Uplink Rates : LTE 50 Mbps, HSPA+ 5.76 Mbps, EVDO 1.8 Mbps (theoretical)
- Frequency Bands :
 - LTE Band 2 (1900 MHz), Band 4 (AWS), Band 5 (850 MHz), Band 13 (700 MHz), Band 17 (700 MHz), Band 25 (1900 MHz)
 - HSPA+/UMTS (850/900/1900/2100 MHz, AWS)
 - GSM/GPRS/EDGE (850/900/1800/1900 MHz)
 - CDMA EVDO Rev A/1xRTT (800/1900 MHz)
- Power : LTE 23 dBm +/- 1, HSPA+ 23 dBm +/- 1, EVDO 24 dBm +0.5/-1 (typical conducted)
- Antennas : two SMA male (plug), 1 dBi (LTE), 2 dBi (Cellular/PCS) gain; finger tighten only (maximum torque spec is 7 kgf-cm)
- GPS: active GPS support
- Industry Standards & Certs : PTCRB, FCC, IC
- Modem Part Number : MC400LPE

HARDWARE

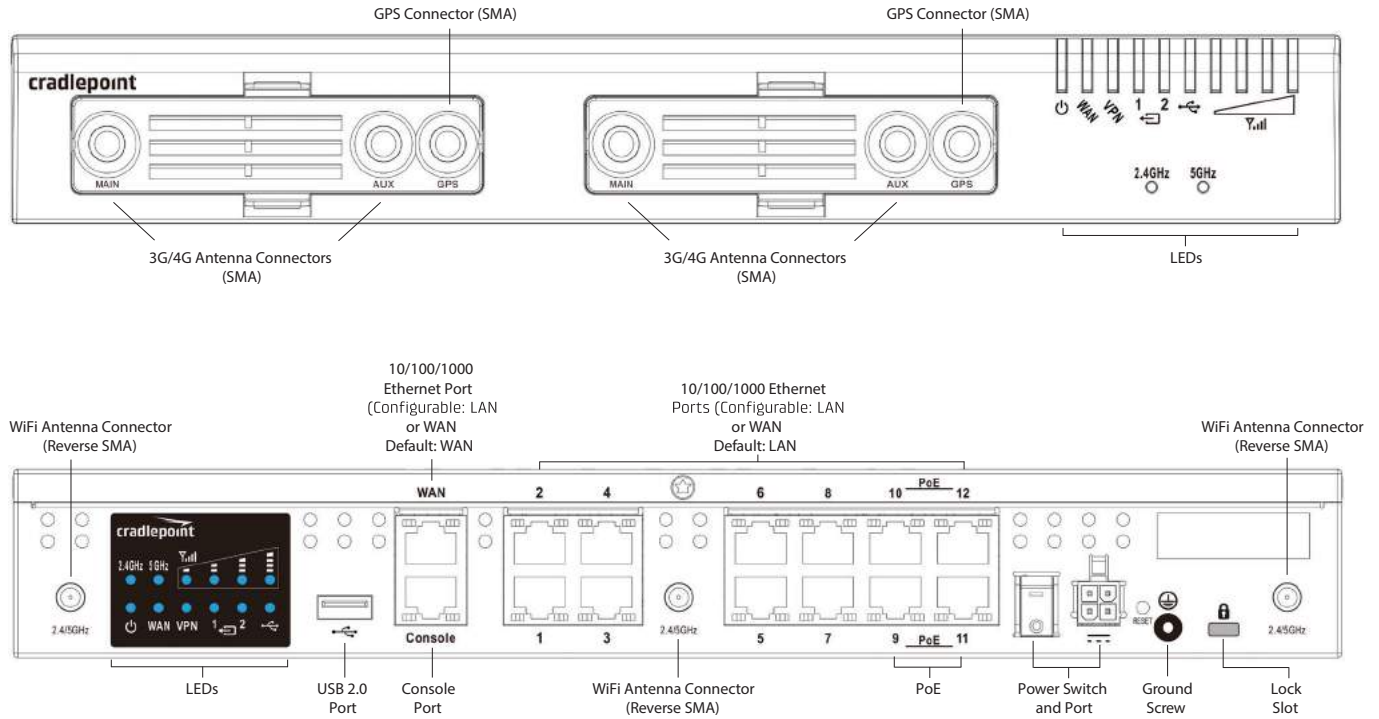

SUPPORT AND WARRANTY

CradleCare Support available with technical support, software upgrades, and advanced hardware exchange – 1-, 3-, and 5-year options.

One-year limited hardware warranty available in the US and Canada; two-year limited hardware warranty for integrated EU products when purchased from an authorized EU distributor – extend warranty to 2, 3, or 5 years.